


Tundra™



Pictured in a Gloss White finish with Duraflect® copper-free mirror

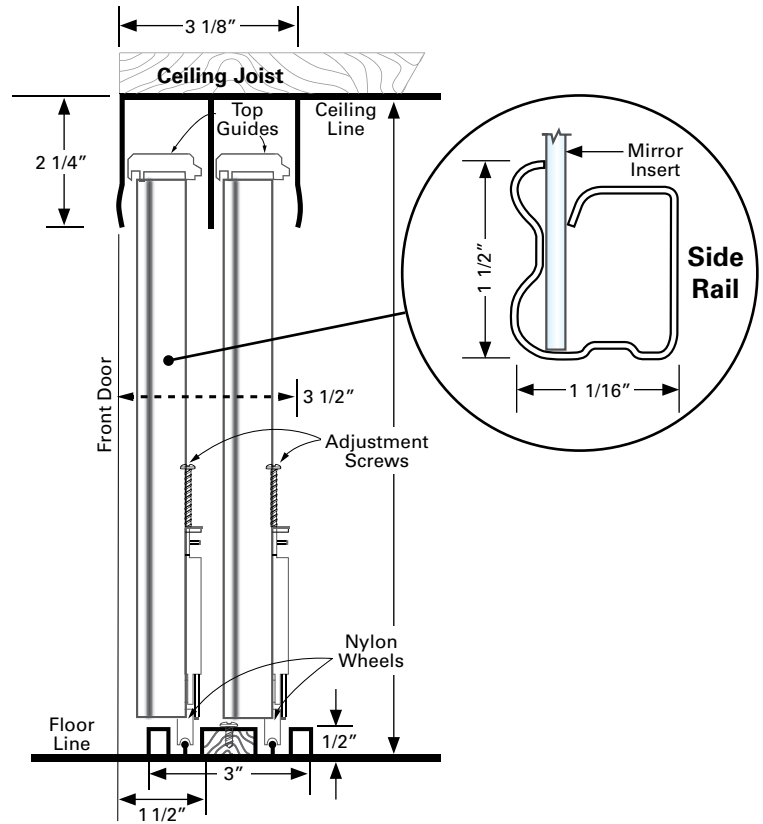

Technical Illustration

Finishes:

- Gloss White

Insert Type:

- 3mm Duraflect® copper-free mirror
 - » Elimination of copper dramatically improves quality and life expectancy
 - » This creates a durable, superior grade mirror with exceptional quality

Frame Type:

- 1 1/2" wide 26 gauge painted steel frame

Track and Channel:

- Heavy-duty 24 gauge steel one piece top channel and bottom track
- Bottom rolled with jump-proof track
- Top channel and bottom track with finish to match
- Injection molded top guides for smooth operation

Product Details:

- 1 1/2" diameter wheels with hardened steel races and 5/32" ball bearings in extra-heavy 18 gauge steel housing
- Side rails are hollow extrusions (tubular) for added strength
- Steel back braces are hot melted to each panel for added strength and rigidity to help prevent warpage
- Duraflect® copper-free mirror panel has 400lb category II safety backing

Sizes:

- Standard sizes
 - » Width: 47", 59", 71", 83", 95", 107", 119", 143", 167" and 191"
 - » Height: 80 1/2" and 96"
- Custom sizes
 - » Maximum individual panel width is 48"
 - » Maximum opening height is 99"
- Adjustment range for opening height is up or down 1/2"

Optional Upgrades:

- Polished or 1/2" beveled mirror fascia
- Decorative back painted glass inserts
- Decorative mirror inserts
- Decorative wood grain inserts
- Face beveling design (v-groove)

